

SRI SWAMY
PACKAGING
Excellent packaging solutions

MANUFACTURING OF PACKAGING MACHINES



SRI SWAMY PACKAGING


#40/1, 9th Cross Pettechanappa industrial Area,
Kamakshipalya Bangaluru - 560079

Ph: 080 23282102

+91 97410 48466

shreeswamypackaging@gmail.com

SSP 200

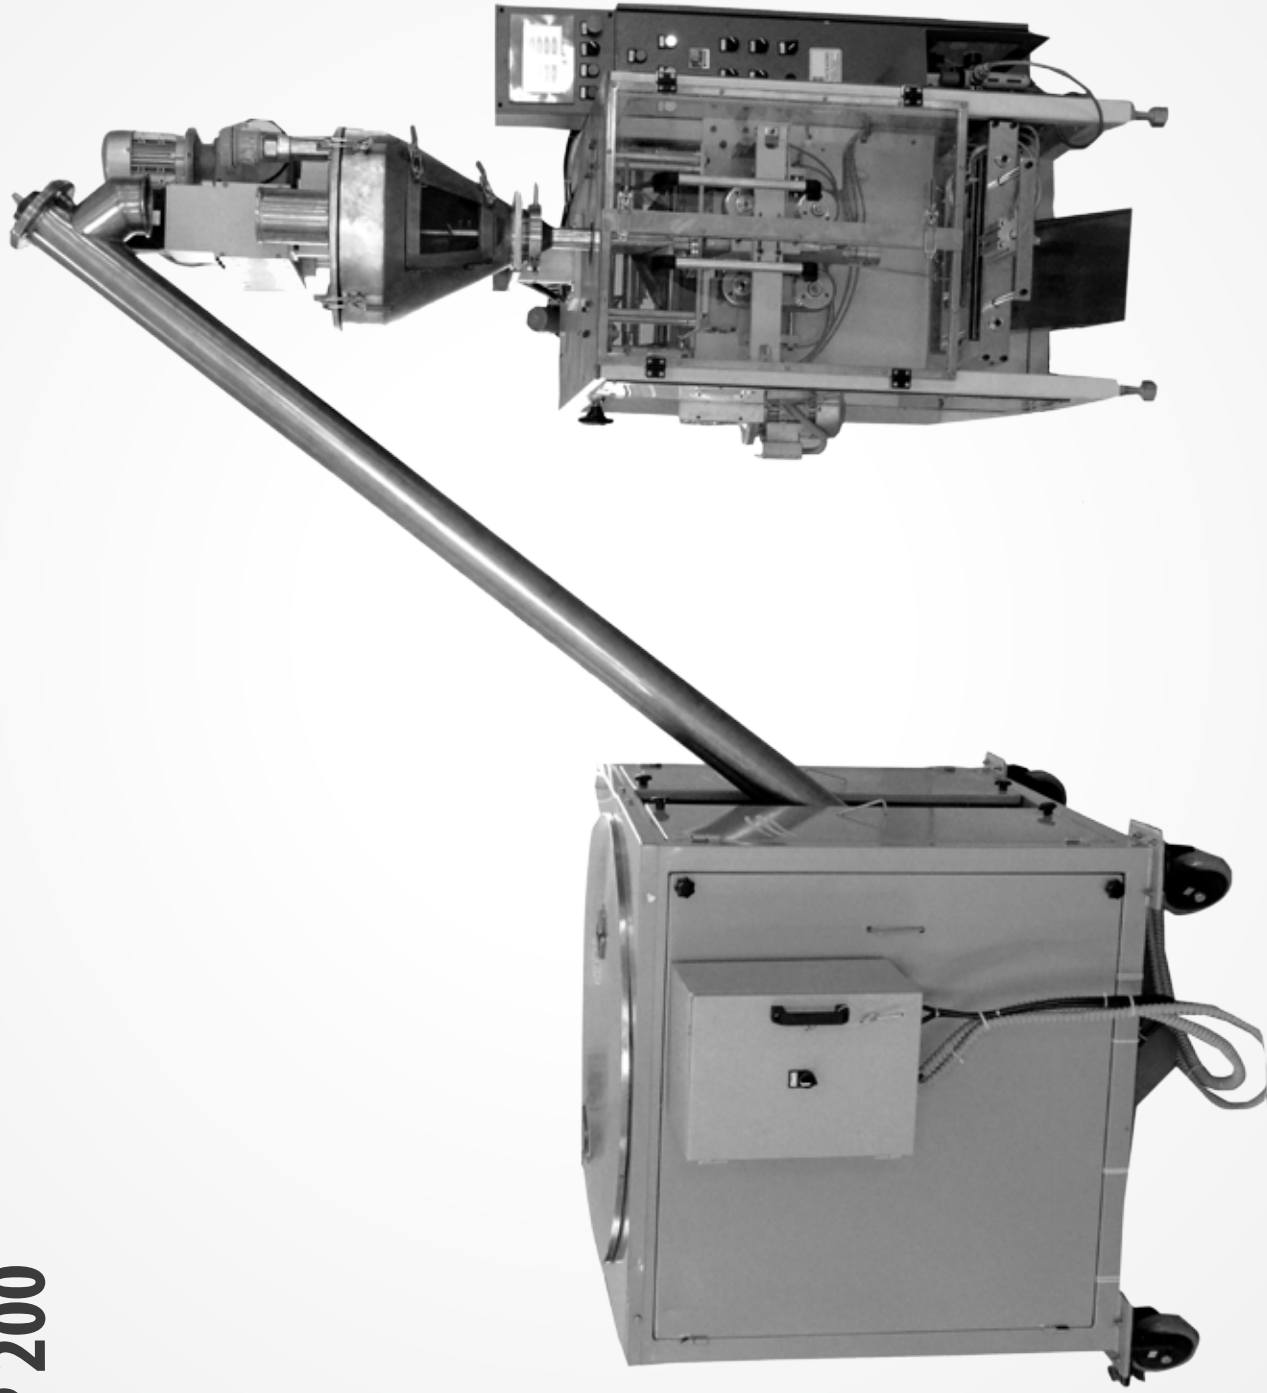

TECHNICAL SPECIFICATION:

Pouch Fromat

Center seal, Gusset pouch, three side & Four lip pack.

Prodcut

Spice, Atta (Flour products) Milk Product, Coffee Powder, Premixes, Agro Chemicals & Automobile Spare Parts and Snack items

Sailent features

- Automation equipped with CE marked PLC and Touch screen HMI
- VFD drive driven bag length control system
- Belt draw off sytem for postive and accurate film pulling
- Pneumatic driven system for horizontal sealing mechanism
- Print mark sensor
- Adjustable stroke of cross sealing jaws for optimum performance
- Designed as per strength quality standards
- HACCP & GMP compatible construction
- Perforation mechanism systems to produce chain of pouches
- Unique stripping action - before across sealing to avoide product entrapping in the seal

Fillers

- Servo Auger filler
- Multi-head weigh filler
- Volumetric cup filler
- Swing on filler to offer common solution for powder & grains
- Bowel feeder with Indexing conveyor for special product like (Automobile spare parts)

Optional Accessories

- Side gusset mechanism
- Gift/Leaflet insertion system
- Rectangular forming system
- Anti trickling device

Allied equipment

- on-line Metal detection system
- Material handling system for product feeding
- Pouch take up conveyor
- Nitrogen flushing facility
- Date/Batch coding device, ie., Ink jet/TTO/Hotfoil
- Poker attachment

Machine

Bagger speed	SSP 200 100ppm	SSP1000 80ppm
Rated system out put (Bagger filler)	70ppm	60ppm
Quantity	up to 200gm	up to 1kg
Pouch	Min Pouch size (W X L) 100 X 160mm	100 x 160mm
	Max Pouch size (W X L) 300 x 200mm	440 x 300mm
Paper pulling Mechanism	Belt Draw off sytem (Servo option available)	Belt Draw off sytem (Servo option available)
Horizontal sealing	Pneumatically driven (Servo option available)	Pneumatic ally driven (Servo option available)
Packing Material	Heatsealable laminate	Heatsealable laminate
Supply voltage	415V AC ,3phase,50HZ	415V AC ,3phase,50HZ
Connecting Load	4.75kw	5.25kw
Airconsumption	17cfm @ 6bar	17cfm @ 6bar
Machine size	1100 X 1210 X 1600 mm	1500 X 1550 X 1600 mm

SSP 200



SSP 1000



SSP 1000



SSP 1000 Dual




SSP Design customized packaging solutions with highest quality standards that help our customers automate their production and provide them a competitive advantage.

MULTI HEAD WEIGHER:

1. Intermediate & continuous motion designed, especially for snack foods application
2. Reputed CE Marked PLC controlled with touch screen HMI
3. HACCP & GMP compatible construction
4. Perforation mechanism systems to produce chain of pouches
5. Double head option
6. Unique stripping action before across sealing to avoid product entrapping in the seal

TECHNICAL SPECIFICATION:

1	Rated (Bagger) out put	60ppm
2	Rated system out put (Bagger filler)	40ppm
3	Pouch format	Center sealed pouch
4	Packaging Material	Heatsealable
5	Min pouch size (w x l)	70 x 80 mm
6	Max pouch size (w x l)	200 x 300 mm
7	Supply voltage	415 v ,3 phase,50 hz
8	Air consumption	17cfm/hour
9	Machine size	

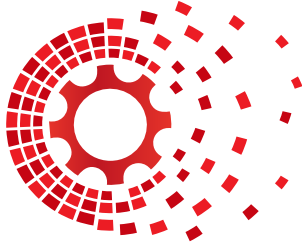

SRI SWAMY PACKAGING

Excellent packaging solutions

SRI SWAMY PACKAGING

#40/ 1,9th Cross Pettechanappa
industrial area, Kamakashipalya
Bangaluru - 560079

+91 97410 48466

shreeswamypackaging@gmail.com

OUR PRESTIGIOUS CUSTOMERS

Schneider
Electric

